


## XPP-5412G Intrinsically Safe Penlight

<b>MARKET APPLICATIONS</b>	Hazardous work environments, industrial, automotive, law enforcement, fire & rescue
<b>DESCRIPTION</b>	This non-rechargeable penlight is cETLus, ATEX and IECEx listed Intrinsically Safe. It is ultra-compact and super slim with a powerful light output designed to illuminate very tight spaces. The tail-cap switch provides momentary or constant-on functionality. Power comes from 3 AAAA premium batteries (included).
<b>CASE MATERIAL</b>	Engineered Polymer - Green
<b>DIMENSIONS</b>	Length: 6.8 inches (173 mm) • Head Diameter: 0.6 inches (15 mm) • Handle Diameter: 0.5 inches (13 mm)
<b>WEIGHT</b>	Weight: 1.5 oz. (43 g) with batteries installed
<b>LENS</b>	Unbreakable polycarbonate with scratch resistant coating
<b>LIGHT SOURCE</b>	Flashlight: CREE® LED Impervious to shock with a 50,000 hour lifetime
<b>LIGHT OUTPUT</b>	50 lumens
<b>ON/OFF</b>	Single Tail-Cap Switch - Momentary or Constant-on Flashlight
<b>RUN-TIME</b>	13.75 hours
<b>BATTERY</b>	3 Premium alkaline AAAA batteries (included)
<b>FEATURES</b>	<ul style="list-style-type: none"> <li>• cETLus, ATEX and IECEx listed Intrinsically Safe</li> <li>• CREE® LED technology – 50,000 + hours LED life</li> <li>• Momentary or constant-on flashlight</li> <li>• Sharp focused beam for illuminating tight spaces</li> <li>• Engineered polymer housing</li> <li>• Non-slip grip</li> <li>• Single body switch</li> <li>• Waterproof</li> <li>• Impact &amp; chemical resistant</li> <li>• Built-in pocket/belt clip</li> <li>• Includes 3 premium AAAA alkaline batteries</li> </ul>

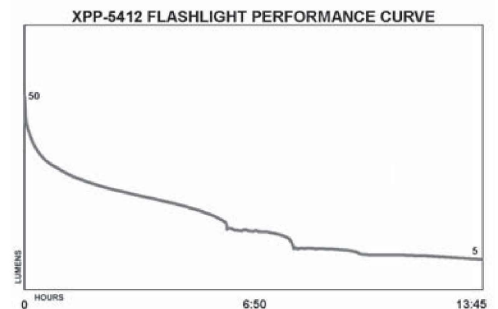

**WARRANTY** Limited Lifetime Warranty • Includes the LEDs, housing and lenses. Rechargeable batteries, chargers, switches, electronics and included accessories are warranted for a period of two years with proof of purchase. Disposable, non-rechargeable batteries are excluded from this warranty. Normal wear and failures which are caused by accidents, misuse, abuse, faulty installation and lightning damage are also excluded.

**APPROVALS**



FL 1 STANDARD		

<b>Nightstick 5412 Penlight</b>	
 ID 4001184 INTRINSICALLY SAFE SECURITE INTRINSEQUE	
CLASS I DIV 1 GRPS A-D T3 CLASS II & III DIV1 GRPS E-G T135C CLASS I ZONE 0 AEx ia IIC T3 Ga CLASS I ZONE 0 Ex ia IIC T3 Ga I M 1 Ex ia op is I Ma II 1 G Ex ia op is IIC T3 Ga	Ex ia op is I Ma Ex ia op is IIC T3 Ga Intertek ITS 13 ATEX27839X IECEx ITS 14.0036X -20°C ≤ Tamb ≤ +40°C 1.5V/Cell AAAA Alkaline
CE 0359	
<b>Conforms to:</b> ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11 ANSI/ISA 60079-26	<b>Certified to:</b> CAN/CSA STD C22.2 No 157 CAN/CSA STD C22.2 No 60079-0 CAN/CSA STD C22.2 No 60079-11 CSA STD C22.2 No 25

Flashlight

