


# Fuji Duo Series SC-E Contactors

## Accessories

Optional accessories

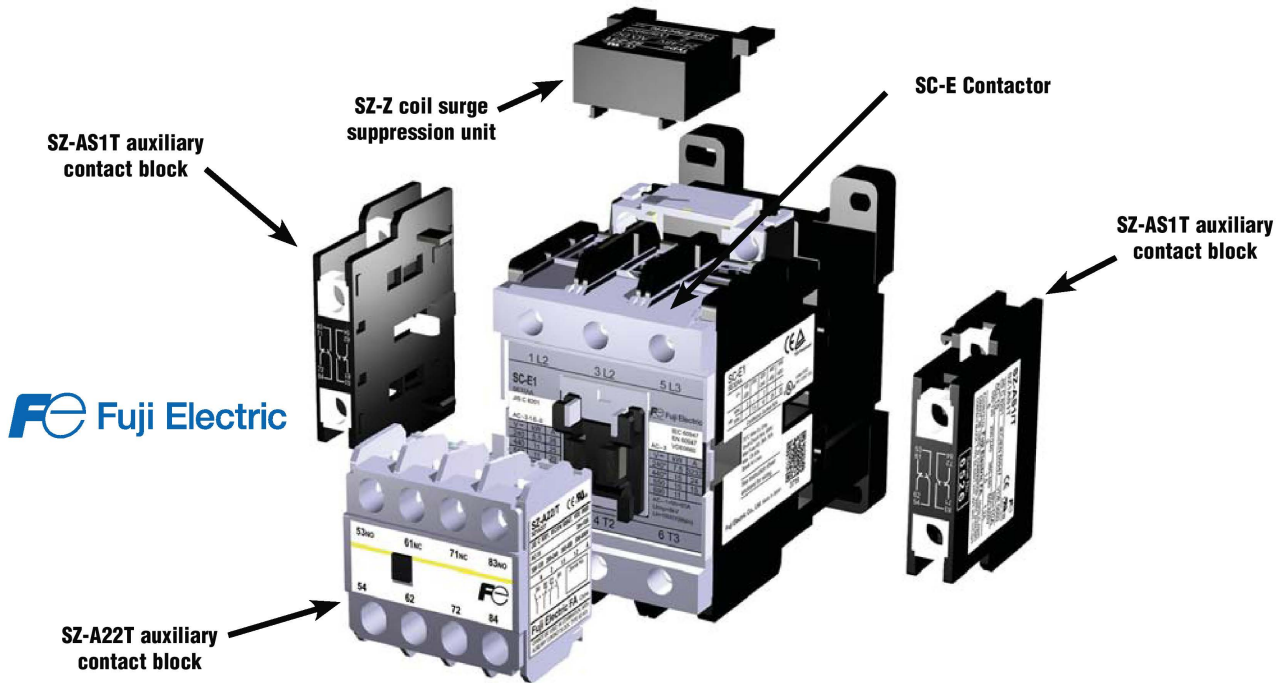

### Auxiliary contact blocks with terminal covers

Maximum auxiliary contact blocks: 2 side mounted (1 per side) **OR** 1 front mounted. The front and side blocks cannot be mounted together on the same contactor.



SZ-A22T



SZ-A11T



SZ-AS1T



SZ-AS2T

### Caution on use:

1. Front mounting auxiliary contact block and side mounting block cannot be attached to one contactor at the same time.
2. Only one front mounting block can be attached to one contactor.
3. Where interlock unit is already attached, side mounting auxiliary contact block can be attached on one side only.

Auxiliary Contact Blocks with Terminal Covers					
Part Number	Applicable Contactor	Mounting	Number of Contacts	Contact Arrangement	
SZ-A22T	SC-E02(G)-xxx to E4(G)-xxx	Front mounting	4	2NO + 2NC	
SZ-A20T			2	2NO	
SZ-A11T			2	1NO + 1NC	
SZ-AS1T	SC-E02(G)-xxx to E4(G)-xxx	Side mounting	2	1NO + 1NC	
SZ-AS2T	SC-E5, E6, E7-xxx, SC-N4, N5, N6, N7, N8, N10, N11, N12, SC-E5(G)-xxx to E7(G)-xxx		2	1NO + 1NC	

Accessory Auxiliary Contact Ratings - UL and CSA				
NEMA ICS 5-2000 Ratings <small>(note 1)</small>				
AC Ratings			DC Ratings	
Designation	Making VA	Breaking VA	Designation	Making/Breaking VA
A600	7200	720	Q300	69