


## ProLume<sup>®</sup> Pulse Start Metal Halide Ballast Specifications


BALLAST SPECIFICATIONS		
Input Volts	120V	277V
Frequency	60 Hz	
Circuit Type	HX-HPF	
Input Power	72W	
Starting Current	0.65A	0.29A
Operating Current	0.58A	0.25A
Open Circuit Current	1.25A	0.54A
Recommended Fuse	3.0A	2.0A
Open Circuit Volts	260V	
Short Circuit Current (Input)	0.50A	0.23A
Short Circuit Current (Secondary)	0.70-1.00A	
Insulation System	Class H, 180°C	
UL 1029 Bench Top Rise Code	A	B
Min. Starting Temp	-22°F / -30°C	

### CAPACITOR




Diameter: 1.38"  
Height: 1.89"  
Cap.: 6mfd +/- 3%  
Minimum Volts: 280V  
Case Max. Temp.: 100°C

### WIRING DIAGRAM




Cap unused leads with wire nuts.

### IGNITOR



IGN/MH1


### SOCKETS



Product Number	Product Code	Terminal	Lead Length
91010	SKT/E39/4KV	Screw	10"
91011	SKT/E26/4KV	Screw	18"

NEW ITEM!

### BALLAST DIMENSIONS

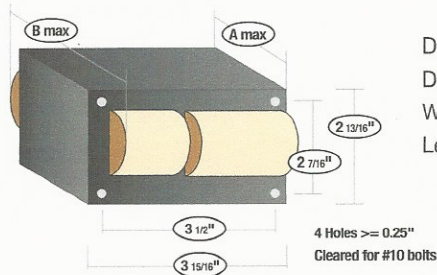

Dim. (A): 1.05"  
Dim. (B): 2.10"  
Weight: 4.00 lbs  
Lead Length: 12"

### REPLACEMENT KIT MOUNTING BRACKET

